

SOLO

ALL-IN-ONE LED DOWNLIGHT 10W

NEW & IMPROVED DESIGN

- ✓ **EASIER COLOUR CHANGE**
Switch is behind removable fascia
- ✓ **EASIER TO INSTALL**
Fits in 90mm void height
Driver on flexible connection

WINNING ORIGINAL FEATURES

- ✓ **SAME BRIGHT OUTPUT**
- ✓ **SAME 5-YEAR WARRANTY**
- ✓ **SAME APPEARANCE**
Can be installed alongside original version

3 COLOURS




3000K WARM WHITE

Recommended for home, hospitality.



4000K COOL WHITE

Recommended for lobby, corridor, washroom.



6000K DAYLIGHT WHITE


Recommended for office, workshop.

3 FASCIAS

STEEL

CHROME

WHITE

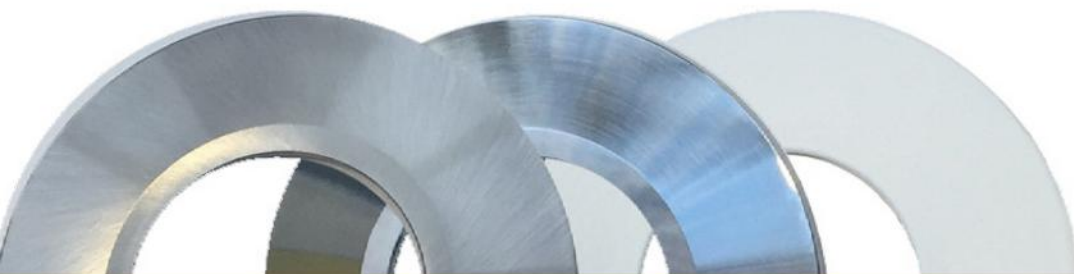

1 DOWNLIGHT

- ✓ **DIMMABLE**
- ✓ **FIRE RESISTANT 90 MINUTES**
- ✓ **WATER RESISTANT IP65 Fascia**
- ✓ **3-HOUR EMERGENCY VERSION AVAILABLE**


YOUR VERSATILE LIGHTING SOLUTION

SOLO


SPECIFICATION

Item	833570
Quantity	1
Light Colour	3000K (WW) / 4000K (CW) / 6000K (DL)
Ra, Consistency	Ra80, 6 SDCM
Luminous flux	615lm (WW) / 740lm (CW) / 649lm (DL)
Beam Angle, Light Intensity	40°, 2185 cd
Accent Lighting	Yes
Warm Up Time	Instant
Dimmable	Yes (Max.20 fittings)
Size	55mm x 85mm x 85mm (Excluding driver)
Power Input	10W at 230VAC 50-60Hz
Power Factor & Current	0.9, 285mA
Lamp Type	COB
Fire Resistance	BS476-22 90 minutes
Working Temperature	-30°C, +35°C
Construction	Aluminium heat sink, steel fascia
IP Rating	IP65 Fascia only
Energy Efficiency Index	A+
Energy Consumption	10 kWh / 1000 h
Lifetime	50,000 h
Building Regs - Part L	Yes
Warranty & LMF at EoL	5 years
Switching Cycles	100,000


INSTALLATION INSTRUCTIONS

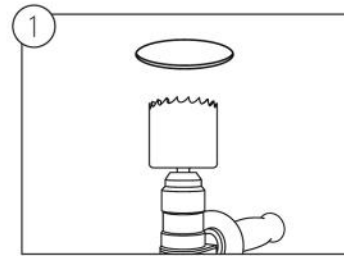


Mark the desired position and carefully cut out. Space requirements on base of carton.

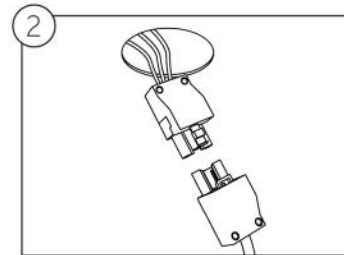


Connect wires using the plug and play connectors.

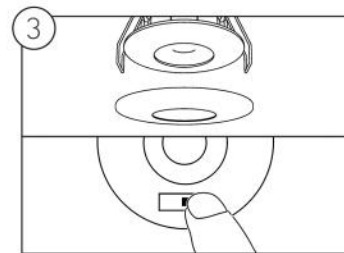

Remove bezel and move switch to select light colour: warm white, cool white or daylight white.

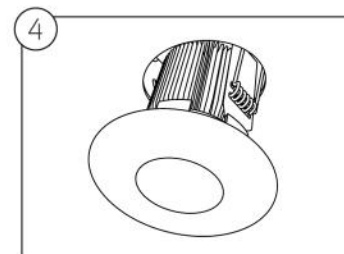

...Optionally affix a different magnetic bezel from the assortment in the carton.

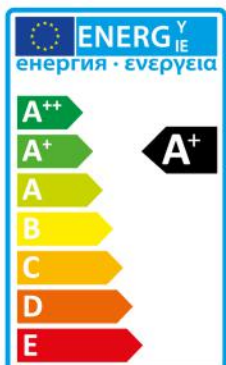

SPACE REQUIREMENT

